

FISH & RICHARDSON P.C.

Frederick P. Fish
1855-1930

W.K. Richardson
1859-1951

August 3, 1999

Attorney Docket No.: 06975/050001

Box Patent Application

Assistant Commissioner for Patents
Washington, DC 20231

Presented for filing is a new original patent application of:

Applicant: ROBERT M. COOPER; GEORGE D. ESCOBAR;
LAURENCE F. KIRSH; CARLOS A. SILVA, JR.
Title: VARYING ELECTRONIC CONTENT BASED ON LOCAL
CONTEXT

Enclosed are the following papers, including those required to receive a filing date under 37 CFR §1.53(b):

	<u>Pages</u>
Specification	21
Claims	13
Abstract	1
Signed Declaration	[To Be Filed At A Later Date]
Drawing(s)	11

Basic filing fee	760.00
Total claims in excess of 20 times \$18.00	882.00
Independent claims in excess of 3 times \$78.00	234.00
Fee for multiple dependent claims	0.00
Total filing fee:	\$ 1876.00

Under 37 CFR §1.53(d), no filing fee is being paid at this time. Please apply any other required fees, **EXCEPT FOR THE FILING FEE**, to deposit account 06-1050, referencing the attorney docket number shown above. A duplicate copy of this transmittal letter is attached.

If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at 202/783-5070.

601 Thirteenth Street N.W.
Washington, DC 20005

Telephone
202 783-5070

Facsimile
202 783-2331

Web Site
www.fr.com



BOSTON
NEW YORK
SILICON VALLEY
SOUTHERN CALIFORNIA
TWIN CITIES
WASHINGTON, DC

FISH & RICHARDSON P.C.

August 3, 1999


Page 2

Kindly acknowledge receipt of this application by returning the enclosed postcard.

Please send all correspondence to:

John C. Phillips
Fish & Richardson P.C.
601 13th Street NW
Washington, D.C. 20005

Respectfully submitted,



John C. Phillips
Reg. No. 35,322
Enclosures
100539.W11

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: VARYING ELECTRONIC CONTENT
BASED ON LOCAL CONTEXT

APPLICANT: ROBERT M. COOPER; GEORGE D. ESCOBAR;
LAURENCE F. KIRSH; CARLOS A. SILVA, JR.

VARYING ELECTRONIC CONTENT BASED ON LOCAL CONTEXT

Technical Field

This application relates to varying electronic
5 content based on a local context, for example, adjusting the
look, feel and content of a webpage based on a local time of
day.

Background

The computer system 100 illustrated in Fig. 1
10 represents a typical hardware setup for executing software
that allows a user to perform tasks such as communicating
with other computer users, accessing various computer
resources, and viewing, creating, or otherwise manipulating
electronic content -- that is, any combination of text,
15 images, movies, music or other sounds, animations, 3D
virtual worlds, and links to other objects. The system
includes various input/output (I/O) devices (mouse 103,
keyboard 105, display 107) and a general purpose computer
100 having a central processor unit (CPU) 121, an I/O unit
20 117 and a memory 109 that stores data and various programs
such as an operating system 111, and one or more application
programs 113. The computer system 100 also typically
includes some sort of communications card or device 123
(e.g., a modem or other network adapter) for exchanging data
25 with a network 127 via a communications link 125 (e.g., a
telephone line).

As shown in Fig. 2, a user of a computer system can
access electronic content or other resources either stored
locally at the user's own client system 202 (for example, a
30 personal or laptop computer) or remotely at one or more
server systems 200. An example of a server system is a host

computer that provides subscribers with online computer services such as e-mail, e-commerce, chat rooms, Internet access, electronic newspapers and magazines, etc. Users of a host computer's online services typically communicate with one or more central server systems 200 through client software executing on their respective client systems 202.

In practice, a server system 200 typically will not be a single monolithic entity but rather will be a network of interconnected server computers, possibly physically dispersed from each other, each dedicated to its own set of duties and/or to a particular geographical region. In such a case, the individual servers are interconnected by a network of communication links, in known fashion. One such server system is "America Online 4.0" from America Online, Incorporated of Virginia.

A "browser" is an example of client software that enables users to access and view electronic content stored either locally or remotely, such as in a network environment (local area network (LAN), intranet, Internet). A browser typically is used for displaying documents described in Hyper-Text Markup Language (HTML) and stored on servers connected to a network such as the Internet.

A user instructs a browser to access an HTML document, or webpage, by specifying a network address -- or Uniform Resource Locator (URL) -- at which a desired document resides. In response, the browser contacts the corresponding server hosting the requested webpage, retrieves the one or more files that make up the webpage, and then displays the webpage in a window on the user's computer screen.

Fig. 3 is a screenshot of a browser application 300 (Microsoft Internet Explorer) displaying a typical HTML document, or webpage 302. As shown therein, a single

webpage 302 may be composed of several different files potentially of different data types 304 (for example, text, graphics, images, virtual worlds, sounds, movies, etc.). In addition, a webpage can include links 306 pointing to other
5 resources (for example, webpages or individual files) available on the network. Links 306 can take virtually any visual form, for example, they can appear either as a text string or as a graphical image or a combination thereof. Each link 306 has an associated URL pointing to a location
10 on the network. When a user clicks on, or otherwise selects a displayed link 306, the browser automatically will retrieve the webpage (or other resource) corresponding to the link's associated URL and display it to, or execute it for, the user.

15 Referring to Fig. 4, a "web-based TV" system 400 has been developed that makes dual usage of conventional TV sets 402. That is, a user, or viewer, of web-based TV either can watch TV or view webpages and otherwise "surf" the Internet. In this regard, a special purpose computer 404, referred to
20 as a "set top device," is used in connection with standard TV sets 402 for viewing webpages on the Internet. The set top device 404 essentially has the same basic components as the general purpose computer 100 illustrated in Fig. 1, except that it also includes a TV tuner 406 for receiving TV
25 programming in the form of broadcast and/or cable TV signals. The set top device 404 thus can selectively display two different sources of content (TV programming received by TV tuner 406 and web or network content received by communications card 123) on a TV monitor 402 connected to
30 the set top device 404.

Accessories may be added to the web-based TV system 400, for example, a wireless keyboard 408. The wireless keyboard 408 can be similar to keyboard 104 but it also may

have specialized keys designed for use in the web-based TV system 400 to make viewing and web surfing easier.

Additionally, a wireless remote control 410 may be used to control the set top device 404 and to facilitate channel surfing and web-based TV connections via various buttons 412, which may be specialized for the web-based TV environment.

An example of an existing web-based TV system 400 is "WebTV" by Microsoft. Information about WebTV service may be found at WebTV's various webpages, for example, at <http://www.webtv.net> and <http://developer.webtv.net>.

In conventional web-based TV systems, the "look and feel" of the viewer interface (i.e., a collection of visually embodied mechanisms through which the viewer exchanges information with the web-based TV system) typically is unaffected by a viewer's particular situation or context. That is, each viewer, regardless of time of day, location or circumstance will be presented with essentially the same interface and graphics. In addition, the web content or other computer network-based resources presented to viewers is the same without regard to the viewers' respective local times, locations, etc. Accordingly, the present inventors recognized that it would be desirable to vary the look, feel, content and/or other resources based on a user's local context, for example, the user's local time of day.

Summary

Various implementations may include one or more of the following features.

A web-based TV system may include a local computer (e.g., a set top device) at a local site (e.g., a viewer's home or workplace) operatively coupled to, and capable of

logging on and off of, a host computer system at a remote site -- e.g., a system maintained by an online service provider. Other components at the viewer's local site may include a network adapter for communicating with the host
5 computer, a TV tuner for receiving TV signals, a display monitor for displaying computer-network-based and/or TV content, and various input devices to receive input from the viewer.

In one implementation, electronic content is
10 presented to a viewer of the web-based TV system by detecting that the viewer has requested access to a content page. If so, it is determined whether or not the viewer is logged into the host computer and a local context (e.g., local time of day, day-part, etc.) for that viewer is
15 identified. Context-specific information associated with the determined local context (e.g., a look and feel for the content page) is then retrieved (i) from the host computer if the viewer is determined to be logged in to the host computer, or (ii) from the local computer if the viewer is
20 not logged in to the host computer. The content page is then customized based on the retrieved context-specific information.

The local context can be based on information from the host computer or from the local computer or both. A
25 local context can correspond not only to the local time day of day, but also, or instead, to a day-part (morning, noon, evening, etc.) or to one or more factors associated with the viewer such as geographic location, history of viewing patterns, personal or demographic data (e.g., age, gender,
30 occupation, income, education, interests, or family status), or history of e-commerce transactions.

The customized content page presented by the web-based TV system can include text, graphics, utilities and/or

a display of a TV program. Customizing the content page may involve adjusting a "look and feel" of the content page to complement the determined local context, for example, by specifying one or more background colors for the content page, by specifying a thematic element associated with the determined local context, and/or by modifying a viewer interface for the content page.

Alternatively, or in addition, customizing the content page may involve changing content in the page, for example, by changing text and/or graphics (e.g., advertisements, news, feature headlines, in the content page) and/or by providing access to one or more utilities (e.g., communications utilities such as e-mail, instant messaging, chatrooms, etc.). Modifying content on the content page also may involve changing one or more of the functionalities made available by the content page, for example, by changing links (e.g., providing access to associated resources) made available by the content page.

The set top device can receive context-related information from the host system and store the received information at the local site for future use. In that case, customizing the content page may involve retrieving a first portion of context-related information from the local site and a second portion of context-related information from the remote site. The first portion of context-related information may correspond to a look and feel of the content page and the second portion of context-related information may correspond to content of the content page.

The web-based TV system may determine whether the set top device is actively connected to the host system. Customizing the content page may involve retrieving context-related information (i) from the remote site if the set top device is determined to be actively connected to the host

system (ii) from the local site if the set top device is determined not to be actively connected to the host system.

Customizing the content page also may involve receiving context-related information in a vertical blanking interval of a TV signal, or using satellite communications.

Presenting the customized content page to the viewer comprises displaying a window on the viewer's display monitor.

In another implementation, presenting electronic content in a web-based TV system including a host computer and a local computer may involve detecting that a viewer of the web-based TV system has requested access to a content page; determining a local time of day for the viewer; determining whether the viewer is logged in to the host computer; retrieving day-part information associated with the determined local time of day, the day-part information being retrieved (i) from the host computer if the viewer is determined to be logged in to the host computer, or (ii) from the local computer if the viewer is not logged in to the host computer; and customizing the content page based on the retrieved day-part information.

In yet another implementation, presenting electronic content in a computer-network based environment including a host computer and a local computer involves determining a local context for a user of the computer network, selectively retrieving from the host computer or from the local computer context-related information associated with the determined local context; and customizing the content page based on the retrieved context-related information.

One or more of the following advantages may be realized. The techniques and methods described here may enable a web-based TV system to provide viewers with a viewer interface having a look and feel customized to each

viewer's personal or local context -- for example, local time of day. In addition, the content made available to viewer's (e.g., text, images, utilities, functionality, etc.) can be tailored to complement each viewer's local context. As a result, the web-based TV viewing experience is enhanced both aesthetically and functionally.

Moreover, enabling the set top device to vary the look and feel and/or content of a page both while in an online and offline state, further enhances the viewing experience. Viewers receive the benefits of context-customized content without the inconvenience and potential costs of having to be connected to a host computer system during most or all of the viewing session. At the same time, the web-based TV service provider benefits by not having to support the increased number of connection ports that would otherwise be necessary.

The details of one or more embodiments are set forth in the accompanying drawings and the description below. Other features, objects, and advantages will be apparent from the description and drawings, and from the claims.

Drawing Descriptions

Fig. 1 is a block diagram of a computer system.

Fig. 2 shows a typical network computing environment.

Fig. 3 shows a screenshot of a browser displaying a webpage.

Fig. 4 is a block diagram of a set top device.

Fig. 5 is a simulated screenshot showing an example of customizing a web-based TV viewer interface based on local time.

Figs. 6A-6C are screenshots showing examples of varying content pages based on a local time of day.

Fig. 7 is a diagram showing various sources of information available to a set top device in a web-based TV environment.

Figs. 8 and 9 are flowcharts of customizing a content page based on a local context.

Like reference numbers and designations in the various drawings indicate like elements.

Detailed Description

Fig. 5 is a simulated screenshot. It shows example of what a viewer might see in a web-based TV environment that customizes content and varies the look and feel of a viewer interface according to a local context, for example, the local time of day. As used herein, "look and feel" refers to the virtually any factor that influences a viewer's interaction with, or perception of, a content page. These factors can be either aesthetic or functional or both, and can include items such as colors, designs, graphics, user-interface controls, window attributes, text fonts, etc.

As shown in Fig. 5, the TV monitor screen 500 includes several different elements including a video display region 502 in which received broadcast or cable TV signals are displayed, a title bar or "hat" region 504 to display status information and the like relating to the web-based TV service provider (in this case "AOL TV"), and a frame region 506 essentially encompassing the video display region 502. The frame region 506 itself is made up of several different components including a graphic 508 or other thematic element, a utility 510 (for example, a chat room area), a product advertisement 512, a programming advertisement 514, and news or feature headlines 516.

The purposes of the frame region 506 are several including accentuating the video display region 502, adding

a theme, mood or look and feel to the TV screen display as a whole in a manner that emphasizes the viewer's current context, and providing the viewer with access to information and/or resources in which the viewer is likely to be
5 interested based on the current context. "Context" as used herein is intended to include virtually any factor or characteristic relating to the viewer's personal situation or viewing experience. For example, a viewer's context could be based on one or more of the following factors:
10 local time of day, geographic region, the viewer's history of viewing choices, demographic or personal data entered by the viewer (e.g., age, gender, occupation, income, education, interests, family status, etc.), the viewer's history of e-commerce transactions, etc.

15 The frame region 506 shown in Fig. 5 arguably fulfills all of the intended purposes. In this example, the scheduled TV programming being viewed by the viewer is a latenight talk show called "Talk-At-You Live!" which happens to come on at 1:00am in the viewer's local time.

20 Accordingly, the current context can be characterized as "latenight" -- meaning that the local time for this viewer is near or after midnight. The designation "latenight" is known in the parlance of the TV network and broadcasting industry as a "day-part." Other typical day-parts include
25 morning, afternoon, and primetime. Ordinarily, TV broadcasters schedule TV programming such that TV programs are broadcast during day-parts appropriate for their content. Each of the day-parts can serve as a viewer's context, as that term is used herein.

30 Although the viewer in the example of Fig. 5 is in a latenight context, other viewers of AOL TV at the same instant in time will have different contexts, for example, based on the local time in their respective time zones. If,

for example, the viewer of the screen in Fig. 5 lived in New York City, the local time for a viewer in Los Angeles would be 10:00pm, which falls into the primetime day-part. In that case, it would be inappropriate to display a latenight look and feel, or to provide latenight-related resources, to the Los Angeles viewer. Rather, the Los Angeles viewer should be presented with content and a look and feel that are appropriate to that viewer's context, namely, the primetime day-part. Accordingly, one of the purposes of the frame region 506 is to accentuate or complement the viewer's current local context.

To this end, the frame region 506 in Fig. 5 includes several elements and features that are consistent with, and accentuate, the latenight context. First, the frame 506 includes a thematic element -- namely graphic 508 (owl and moon) -- that complements and emphasizes the latenight day-part. In addition, the frame 506 could include coloring, shading or other graphic effects (e.g., a midnight blue background) that are suggestive of the latenight theme.

The frame region 506 also may include informational items that may relate to the latenight context. For example, the product advertisement 512 is targeted at viewers who stay up late at night watching TV and who might suffer from insomnia. Similarly, the programming advertisement 514 provides information about a latenight TV program that the viewer might be interested in watching.

In addition to thematic and informational items, the frame region 506 can include utilities or other functional resources that relate to the current context (latenight) and thus might be of interest to the viewer. In this example, access to "Nite Owl" chatroom is provided is provided by utility 510 so that the viewer can communicate with others

who are staying up late and are logged into the AOL TV service.

Figs. 6A-6C show an example of varying the content and the look and feel in a web-based TV environment in accordance with a changing local context -- namely, changing day-parts from morning to latenight. The three screenshots shown in Figs. 6A-6C are representations of how the News Channel would appear to a viewer during the morning, primetime, and latenight day-parts, respectively. Common graphics are used on all three content pages but their hue values have been adjusted programmatically based on the viewer's local time. This change of color gives viewers a sense of immediacy as they become accustomed to the service.

In addition, the colors selected are appropriately suggestive of the particular day-part in which they are used. For example, the "Morning News" content page shown in Fig. 6A uses warm and soothing orangish-brown colors suggestive of sunrise and the start of the day. In contrast, the "Nightly News" content page displayed during primetime (Fig. 6B) has a background made up of various shades of blue, which are evocative of the late evening. Similarly, the latenight Nightly News page (Fig. 6C) uses a background composed of various shades of purple as a suggestion of the very late hours.

In addition to changing colors and other look and feel elements, the particular content (text, images, utilities, advertisement, channel listings, etc.) made available to viewers also can be changed according to day-part. Typically, each different day-part is sold to a different broadcaster as illustrated in the screenshots. In Fig. 6A, for example, the morning day-part for the News Channel has been sold to the ABC network. Accordingly, many, if not all, of the various segments of the content

page 600 will display information specific to ABC. For example, the ABC Video Source segment 602 will display a video feed of ABC TV programming such as "Good Morning America." Moreover, the Top Story segment 604 and/or the headline segment 606 will include text describing one of the more newsworthy stories being carried that day by an ABC TV program.

The content page 600 also includes an ad segment 608 advertising an ABC TV program that, for example, is unrelated to the News Channel. Lastly, the page 600 can include segments, such local weather segment 610 and Guide segment 612, that do not relate to a particular network but which provide context-related content (e.g., morning weather forecast) or functionality (e.g., links to other pages).

As seen in Figs. 6B and 6C, content pages 614 and 616 have been sold to the CBS and NBC networks, respectively. These pages include segments similar to page 600 but contain content or information relating to their respective networks.

The set top device is able to customize the content and/or look and feel of content pages and the viewer interface regardless of whether the viewer (subscriber to web-based TV service) happens to be online (i.e., "logged in" or actively connected to the service's host computer system) or offline (i.e., not logged into the service's host computer system). The set top device is able to accomplish this feat using one or more of several different techniques.

In general, either the set top device receives context-related information (i.e., content and/or look and feel information relating to specific contexts) ahead of time and stores, or caches, it for later use, or the set top device receives the context-related information "on-the-fly" (i.e., in near real time on a need-specific basis), or a

combination of both. In this regard, the set top device can receive information, including context-related information, from any of several different sources.

Fig. 7 illustrates examples of various sources from which a set top device may receive information including TV programming signals, webpages or other computer-network content, and/or customization information relating to the look and feel of a particular content page for a specific context. As illustrated, the set top device 701 can receive information from a host computer system 703 (e.g., a web-based TV service provider) via a public or private network 705, from a satellite 707 or network TV broadcast facility 708 using microwave or wireless communications 710, or from a cable TV provider by means of direct cabling 713. The set top device 701 receives signals from any or all of these sources and displays them selectively or in combination on a TV monitor 715.

As noted above, when varying or customizing a content page in accordance with a viewer's local context, the set top device 701 can obtain the context-related information on-the-fly directly from the host computer system 703, provided the set top device is logged into the host system 703 at that time. Alternatively, or in addition, the set top device 701 can retrieve locally stored information, e.g., from the set top device's memory or from storage media such as a cassette tape or CD-ROM loaded into a peripheral device connected to the set top device. This locally stored information will have been downloaded previously and cached by the set top box for future use. Retrieval of locally stored information is always available, whether the viewer is offline or online.

Context-related and/or other information can be communicated to the set top device for storage and

subsequent retrieval using any of several different methods. One available technique is to "trickle-down" information from the host system to the set top device in the background (i.e., transparently to, and without being requested by, the viewer) while the viewer is connected to the host system. This trickled-down information is then stored by the set top device so that it is available for future use, for example, if the viewer, while offline, requests a content page requiring context-related information.

An alternative mechanism for communicating context-related or other information to the set top device involves the use of vertical blanking intervals (VBIs) in TV frames. The standard NTSC TV signal used in the United States is made up of "frames" that are broadcast at a rate of 30 each second. Each frame is formed of 525 scan lines divided equally into two separate and contiguous fields, field 1 and field 2. Each field includes 262.5 scan lines, 241.5 of which carry visible TV signal information - that is, portions of the TV picture.

The first 21 lines in each field represent the VBI. The VBI corresponds to the period of time that it takes the electron beam emitted by the TV set's cathode ray tube (CRT) to reposition itself from the bottom of the TV screen to the top of the screen (also referred to "vertical retracing").

After each field is received and displayed the electron beam must be repositioned in this manner before drawing the first scan line of the next field may commence. Accordingly, no visible TV signal information can be transmitted during the VBI, otherwise TV signal information would be lost.

Instead, basically any other type of information may be transmitted to the set top device's TV receiver and used for various purposes, for example, closed captioning, teletext, electronic program guide information, etc. The amount of

data that can be transmitted in this manner is roughly equal to the capacity of a 9600 baud modem for each available scan line in the VBI.

Accordingly, in one implementation, context-related
5 information (e.g., describing the look and feel and/or
content for a content page) can be communicated directly
from the TV broadcaster to a set top device within the VBIs
of a TV signal. For each TV field received, the set top
device can extract this information from the VBI and use it
10 to generate various elements of a content page according to
a viewer's local context. The VBI can be used in this
regard either in real or near real time (i.e., the context-
related information in the VBI can be extracted and used by
the set top box immediately upon receipt) or the VBI can be
15 used to trickle-down information to the set top device for
storage and subsequent retrieval, as described above.

Other mechanisms for communicating context-related
information to the set top device include sending data using
satellite communications -- for example, similar to messages
20 in a pager or Personal Communication Services (PCS) network
-- and/or an "always connected" technology such as Digital
Subscriber Lines (DSL). In either case, the context-related
information received by the set top device either can be
used immediately or stored for subsequent use.

25 Caching context-related information and/or other
content in the set top device in the manners described above
reduces the demands on the host computer system and on the
communication link connecting the host system to the set top
device. For example, viewers need not be logged into the
30 host system in order to be able to view context-related
information. As a result, because viewers can remain logged
off the host system for much, if not all, of the viewing
session, the number of terminal servers or other connection

ports that the host system needs to maintain can be reduced. At the same time, the viewer's telephone line, or other communication medium connecting the viewer to the outside world, need not always be connected to the host system and thus can be freed up for other uses.

Moreover, some online computer service providers might charge their customers based on the cumulative amount of online time (i.e., connected to a host system). In that case, being able to change context-related information while the set top device is in an offline state could benefit subscribers by providing reduced connection-time costs.

Fig. 8 is a flowchart showing an example of the steps involved in a generalized technique for customizing a content page according to a viewer's local context. First, in response to a request for a content page, the set top device will determine the viewer's local context (step 800). In one implementation, this step involves determining the viewer's local time, and thus the viewer's current day-part, by examining a clock or other time-keeping mechanism maintained by, or accessible to, the set top device. Other implementations could involve determining a local context other than time, for example, either based on information stored locally at the set top device or stored remotely at a host computer system.

In other implementations, determining the viewer's local context in step 802 could be more complex and might involve, for example, examining a database of user-specific information to determine the viewer's gender, age, interests, etc. In one such possible implementation, the viewer may have previously specified that the News Channel should be presented to that viewer using a "sports context" -- e.g., the News Channel content page will emphasize or

give priority to news features or headlines that relate to sports.

After having determined the viewer's local context, the set top device next will retrieve context-related
5 information for use in customizing the requested content page (step 802). As discussed above, the context-related information can be retrieved whether the set top device is in an online or offline state, and can come either from local sources (e.g., information previously received and
10 stored in the set top device) or from remote sources (e.g., host computer, VBI, etc.) or a combination of both.

Next, the set top device uses the retrieved context-related information to customize or otherwise tailor the requested content page according to the viewer's local
15 context (step 804), for example, by changing the look and feel of the content page or its content, or both. Finally, the customized content page is presented to the viewer (step 806).

Fig. 9 is a flowchart showing additional details
20 about steps involved in one implementation for customizing a content page according to a viewer's local context. In this example, the context-related information is divided into two different types: (1) look and feel information (e.g., background colors for content pages) and (2) the content
25 itself (e.g., text, images, utilities, functionality, etc.).

The process of Fig. 9 begins when the set top device senses that a viewer has requested a content page, for example, the News Channel page of Figs. 6A-6C (step 900). In response, the set top box determines the local context
30 (e.g., local time or day-part) in the manner described above (step 902).

Next, the set top device retrieves the first type of context-related information -- namely, the look and feel

data -- from local storage (step 904). In this
implementation, the look and feel information ordinarily is
retrieved from the set top device locally, even if other
sources are available (e.g., the set top device is actively
5 connected to the host system). This implementation may be
advantageous when certain types of contexts, such as day-
parts, are being used because such contexts typically are
highly predictable and periodic and require only a modest
amount of look and feel data to be stored locally. In
10 contrast, the content portion of the context-related
information ordinarily will be much larger in size and more
likely to grow stale and thus in need of frequent
replacement. But depending on the particular circumstances,
receiving both types of context-related information (i.e.,
15 both look and feel data and content) from one or more remote
sources might prove advantageous when other types of
contexts are used. Conversely, in still other contexts
storing all context-related information (both look and feel
and content) locally could be beneficial.

20 Next, the set top device determines whether it is
online -- i.e., actively connected to the host system (step
906). If so, the set top device then retrieves the second
type of context-related information (content such text and
images) from the host system (step 910). On the other hand,
25 if the set top device determines that it is offline, the set
top device will retrieve the content from local storage,
using information that was received and cached previously
(step 908).

30 Finally, both types of retrieved context-related
information are used to customize the content page (step
912), which is then presented to the viewer (step 914).

The techniques, methods and systems described here
may find applicability in any computing or processing

environment in which electronic content may be viewed,
accessed or otherwise manipulated. For instance, the
concept of customizing electronic content based on context
could be applied whenever one or more users have access to a
5 source of electronic content. One such environment involves
a computer system (e.g., a Microsoft Windows-based PC or
Apple Macintosh) that includes a TV tuner card and which is
connected to the Internet.

Various implementations of the systems and
10 techniques described here may be realized in digital
electronic circuitry, or in computer hardware, firmware,
software, or in combinations thereof. A system or other
apparatus that uses one or more of the techniques and
methods described here may be implemented as a computer-
15 readable storage medium, configured with a computer program,
where the storage medium so configured causes a computer
system to operate on input and/or generate output in a
specific and predefined manner. Such a computer system may
include one or more programmable processors that receive
20 data and instructions from, and transmit data and
instructions to, a data storage system, and suitable input
and output devices.

Each computer program may be implemented in a high-
level procedural or object-oriented programming language, or
25 in assembly or machine language if desired; and in any case,
the language may be a compiled or interpreted language.
Suitable processors include, by way of example, both general
and special purpose microprocessors.

Generally, a processor will receive instructions and
30 data from a read-only memory and/or a random access memory.
Storage devices suitable for tangibly embodying computer
program instructions and data include all forms of non-
volatile memory, including semiconductor memory devices,

such as EPROM, EEPROM, and flash memory devices; magnetic disks such as internal hard disks and removable disks; magneto-optical disks; and CD-ROM disks.

Any of the foregoing may be supplemented by, or
5 implemented in, specially-designed ASICs (application-specific integrated circuits).

A number of embodiments of the present invention have been described. Nevertheless, it will be understood that various modifications may be made without departing
10 from the spirit and scope of the invention. Accordingly, other embodiments are within the scope of the following claims.

What is claimed is:

1 1. A method of presenting content in a web-based
2 television (TV) environment, the method comprising:
3 determining a local context for a viewer of a web-
4 based TV system;
5 customizing a content page based on the determined
6 local context; and
7 presenting the customized content page to the
8 viewer.

1 2. The method of claim 1 wherein the local context
2 corresponds to a local time of day.

1 3. The method of claim 1 wherein the local context
2 corresponds to a day-part.

1 4. The method of claim 1 wherein the local context
2 corresponds to one or more of the following factors
3 associated with the viewer: a geographic location, a
4 history of viewing patterns, personal or demographic data,
5 or a history of e-commerce transactions.

1 5. The method of claim 4 wherein the personal or
2 demographic data comprises one or more of the following:
3 age, gender, occupation, income, education, interests, or
4 family status.

1 6. The method of claim 1 wherein the web-based TV
2 environment comprises a set top device at a local site and a
3 host system at a remote site, and wherein determining a
4 local context comprises accessing information stored at the
5 local site.

1 7. The method of claim 1 wherein the web-based TV
2 environment comprises a set top device at a local site and a
3 host system at a remote site, and wherein determining a
4 local context comprises accessing information stored at the
5 remote site.

1 8. The method of claim 1 wherein the content page
2 comprises text, graphics, utilities and/or a display of a TV
3 program.

1 9. The method of claim 1 wherein customizing the
2 content page comprises adjusting a look and feel of the
3 content page to complement the determined local context.

1 10. The method of claim 9 wherein adjusting a look
2 and feel of the content page comprises specifying one or
3 more background colors for the content page.

1 11. The method of claim 9 wherein adjusting a look
2 and feel of the content page comprises specifying a thematic
3 element associated with the determined local context.

1 12. The method of claim 9 wherein adjusting a look
2 and feel of the content page comprises modifying a viewer
3 interface for the content page.

1 13. The method of claim 1 wherein customizing the
2 content page comprises changing content in the page.

1 14. The method of claim 13 wherein changing content
2 comprises changing text and/or graphics on the content page.

1 15. The method of claim 14 wherein changing text
2 and/or graphics comprises changing advertisements.

1 16. The method of claim 14 wherein changing text
2 and/or graphics comprises changing news or feature
3 headlines.

1 17. The method of claim 13 wherein changing content
2 comprises modifying the content page to provide access to
3 one or more utilities.

1 18. The method of claim 1 wherein customizing the
2 content page comprises providing access to a communications
3 utility.

1 19. The method of claim 17 wherein modifying the
2 content page comprises changing one or more functionalities
3 made available by the content page.

1 20. The method of claim 17 wherein modifying the
2 content page comprises changing links made available by the
3 content page, the links providing access to associated
4 resources.

1 21. The method of claim 1 wherein the web-based TV
2 environment comprises a set top device at a local site and a
3 host system at a remote site, and wherein the method further
4 comprises the set top device receiving context-related
5 information from the host system and storing the received
6 information at the local site for future use.

1 22. The method of claim 21 wherein customizing the
2 content page comprises retrieving a first portion of
3 context-related information from the local site and a second
4 portion of context-related information from the remote site.

1 23. The method of claim 22 wherein the first
2 portion of context-related information corresponds to a look
3 and feel of the content page and the second portion of
4 context-related information corresponds to content of the
5 content page.

1 24. The method of claim 23 further comprising
2 determining whether the set top device is actively connected
3 to the host system.

1 25. The method of claim 24 wherein customizing the
2 content page comprises retrieving context-related
3 information (i) from the remote site if the set top device
4 is determined to be actively connected to the host system
5 (ii) from the local site if the set top device is determined
6 not to be actively connected to the host system.

1 26. The method of claim 1 wherein customizing the
2 content page comprises receiving context-related information
3 in a vertical blanking interval of a TV signal.

1 27. The method of claim 1 wherein customizing the
2 content page comprises receiving context-related information
3 using satellite communications.

1 28. The method of claim 1 wherein presenting the
2 customized content page to the viewer comprises displaying a
3 window on the viewer's display monitor.

1 29. The method of claim 1 wherein presenting the
2 customized content page comprises presenting TV-based
3 content or computer network-based content or a combination
4 of both.

1 30. A method of presenting electronic content in a
2 computer-network based environment including a host computer
3 and a local computer, the method comprising:

4 determining a local context for a user of the
5 computer network;

6 selectively retrieving from the host computer or
7 from the local computer context-related information
8 associated with the determined local context; and

9 customizing the content page based on the retrieved
10 context-related information.

1 31. The method of claim 30 wherein the selective
2 retrieval of context-related information from the host
3 computer or from the local computer depends on whether the
4 local computer presently is in communication with the host
5 computer.

1 32. The method of claim 30 further comprising
2 determining whether the local computer presently is in
3 communication with the host computer.

1 33. The method of claim 32 wherein the selective
2 retrieval of context-related information comprises
3 retrieving information from the host computer if the local
4 computer is determined to be in communication with the host
5 computer, and retrieving information from the local computer
6 if the local computer is determined not to be in
7 communication to the host computer.

1 34. The method of claim 30 wherein the computer-
2 network based environment comprises a web-based TV system.

1 35. The method of claim 34 wherein the local
2 computer comprises a set top device at a local site and the
3 host computer comprises a host system at a remote site, and
4 wherein determining the local context comprises accessing
5 information stored at the local site.

1 36. The method of claim 34 wherein the local
2 computer comprises a set top device at a local site and the
3 host computer comprises a host system at a remote site, and
4 wherein determining the local context comprises accessing
5 information stored at the remote site.

1 37. The method of claim 30 wherein the local
2 context corresponds to a local time of day.

1 38. The method of claim 30 wherein the local
2 context corresponds to a day-part.

1 39. The method of claim 30 wherein the local
2 context corresponds to one or more of the following factors
3 associated with a viewer: a geographic location, a history
4 of viewing patterns, personal or demographic data, or a
5 history of e-commerce transactions.

1 40. The method of claim 39 wherein the personal or
2 demographic data comprises one or more of the following:
3 age, gender, occupation, income, education, interests, or
4 family status.

1 41. The method of claim 30 wherein the content page
2 comprises text, graphics, utilities and/or a display of a TV
3 program.

1 42. The method of claim 30 wherein customizing the
2 content page comprises adjusting a look and feel of the
3 content page to complement the determined local context.

1 43. The method of claim 42 wherein adjusting a look
2 and feel of the content page comprises specifying one or
3 more background colors for the content page.

1 44. The method of claim 42 wherein adjusting a look
2 and feel of the content page comprises specifying a thematic
3 element associated with the determined local context.

1 45. The method of claim 42 wherein adjusting a look
2 and feel of the content page comprises modifying a viewer
3 interface for the content page.

1 46. The method of claim 30 wherein customizing the
2 content page comprises changing content in the page.

1 47. The method of claim 46 wherein changing content
2 comprises changing text and/or graphics on the content page.

1 48. The method of claim 47 wherein changing text
2 and/or graphics comprises changing advertisements.

1 49. The method of claim 47 wherein changing text
2 and/or graphics comprises changing news or feature
3 headlines.

1 50. The method of claim 46 wherein changing content
2 comprises modifying the content page to provide access to
3 one or more utilities.

1 51. The method of claim 50 wherein modifying the
2 content page comprises providing access to a communications
3 utility.

1 52. The method of claim 50 wherein modifying the
2 content page comprises changing one or more functionalities
3 made available by the content page.

1 53. The method of claim 50 wherein modifying the
2 content page comprises changing links made available by the
3 content page, the links providing access to associated
4 resources.

1 54. The method of claim 30 wherein the local
2 computer comprises a set top device at a local site and the
3 host computer comprises a host system at a remote site, and
4 wherein the method further comprises the set top device
5 receiving context-related information from the host system
6 and storing the received information at the local site for
7 future use.

1 55. The method of claim 54 wherein customizing the
2 content page comprises retrieving a first portion of
3 context-related information from the local site and a second
4 portion of context-related information from the remote site.

1 56. The method of claim 55 wherein the first
2 portion of context-related information corresponds to a look
3 and feel of the content page and the second portion of
4 context-related information corresponds to content of the
5 content page.

1 57. The method of claim 54 further comprising
2 determining whether the set top device is actively connected
3 to the host system.

1 58. The method of claim 57 wherein customizing the
2 content page comprises retrieving context-related
3 information (i) from the remote site if the set top device
4 is determined to be actively connected to the host system
5 (ii) from the local site if the set top device is determined
6 not to be actively connected to the host system.

1 59. The method of claim 30 wherein customizing the
2 content page comprises receiving context-related information
3 in a vertical blanking interval of a TV signal.

1 60. The method of claim 30 wherein customizing the
2 content page comprises receiving context-related information
3 using satellite communications.

1 61. The method of claim 30 further comprising
2 presenting the customized content page to a viewer.

1 62. A method of presenting electronic content in a
2 web-based television (TV) system including a host computer
3 and a local computer, the method comprising:
4 detecting that a user of the web-based TV system has
5 requested access to a content page;
6 determining a local context for the user;
7 determining whether the user is logged in to the
8 host computer;
9 retrieving context-specific information associated
10 with the determined local context, the information being
11 retrieved (i) from the host computer if the user is
12 determined to be logged in to the host computer, or (ii)
13 from the local computer if the user is not logged in to the
14 host computer; and
15 customizing the content page based on the retrieved
16 context-specific information.

63. A method of presenting electronic content in a web-based television (TV) system including a host computer and a local computer, the method comprising:

- detecting that a viewer of the web-based TV system has requested access to a content page;
- determining a local time of day for the viewer;
- determining whether the viewer is logged in to the host computer;
- retrieving day-part information associated with the determined local time of day, the day-part information being retrieved (i) from the host computer if the viewer is determined to be logged in to the host computer, or (ii) from the local computer if the viewer is not logged in to the host computer; and
- customizing the content page based on the retrieved day-part information.

64. A web-based TV system comprising:

- a set top device at a local site being operatively coupled and capable of logging in to a host computer at a remote site, the set top device comprising software instructions to perform the following operations:
 - determine a local context for a viewer of the web-based TV system;
 - customize a content page based on the determined local context; and
 - present the customized content page to the viewer.

65. The system of claim 64 further comprising a display monitor, coupled to the set top device, on which the customized content page is presented to the viewer.

1 66. The system of claim 64 wherein the set top
2 device further comprises:
3 a network adapter for communicating with the host
4 computer; and
5 a TV tuner for receiving TV signals.

1 67. The system of claim 66 wherein the set top
2 device further comprises instructions to selectively receive
3 context information through the network adapter or through
4 the TV tuner.

1 68. The system of claim 67 wherein the instructions
2 to selectively receive context information comprise
3 instructions to receive information (i) through the network
4 adapter if the set top device is actively logged in to the
5 host computer; and (ii) through the TV tuner if if the set
6 top device is not actively logged in to the host computer.

1 69. Computer software, tangibly embodied in a
2 computer-readable medium and/or in a propagated carrier
3 signal, for presenting electronic content in a web-based
4 television (TV) system including a host computer and a local
5 computer, the software comprising instructions to perform
6 the following operations:

7 detect that a user of the web-based TV system has
8 requested access to a content page;

9 determine a local context for the user;

10 determine whether the user is logged in to the host
11 computer;

12 retrieve context-specific information associated
13 with the determined local context, the information being
14 retrieved (i) from the host computer if the user is
15 determined to be logged in to the host computer, or (ii)
16 from the local computer if the user is not logged in to the
17 host computer; and


18 customize the content page based on the retrieved
19 context-specific information.

Abstract of the Disclosure

Electronic content is presented to a viewer in a web-based television (TV) system, including a host computer and a local computer, by detecting that the viewer has requested access to a content page, determining a local context (e.g., local time of day) for that viewer, and determining whether the viewer is logged in to the host computer. Context-specific information associated with the determined local context (e.g., a look and feel for the content page) is then retrieved (i) from the host computer if the viewer is determined to be logged in to the host computer, or (ii) from the local computer if the viewer is not logged in to the host computer. The content page is then customized based on the retrieved context-specific information.

100484.W11

Fig. 1
(PRIOR ART)

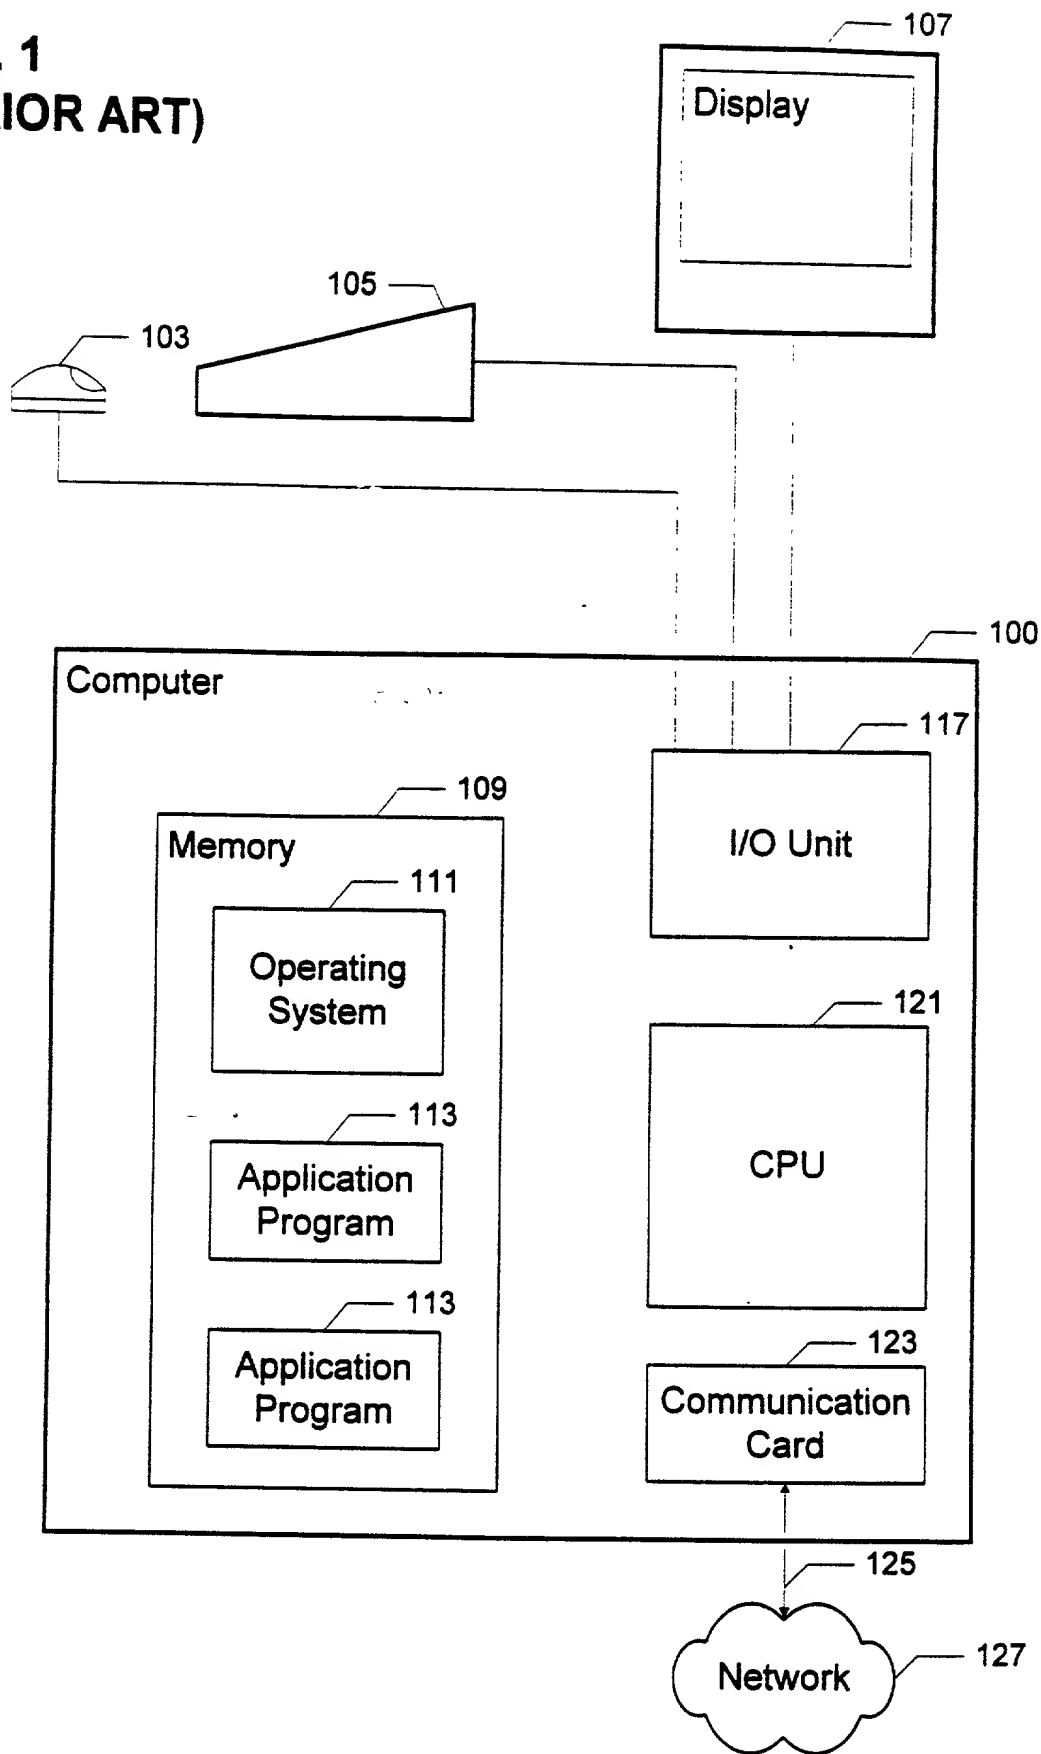

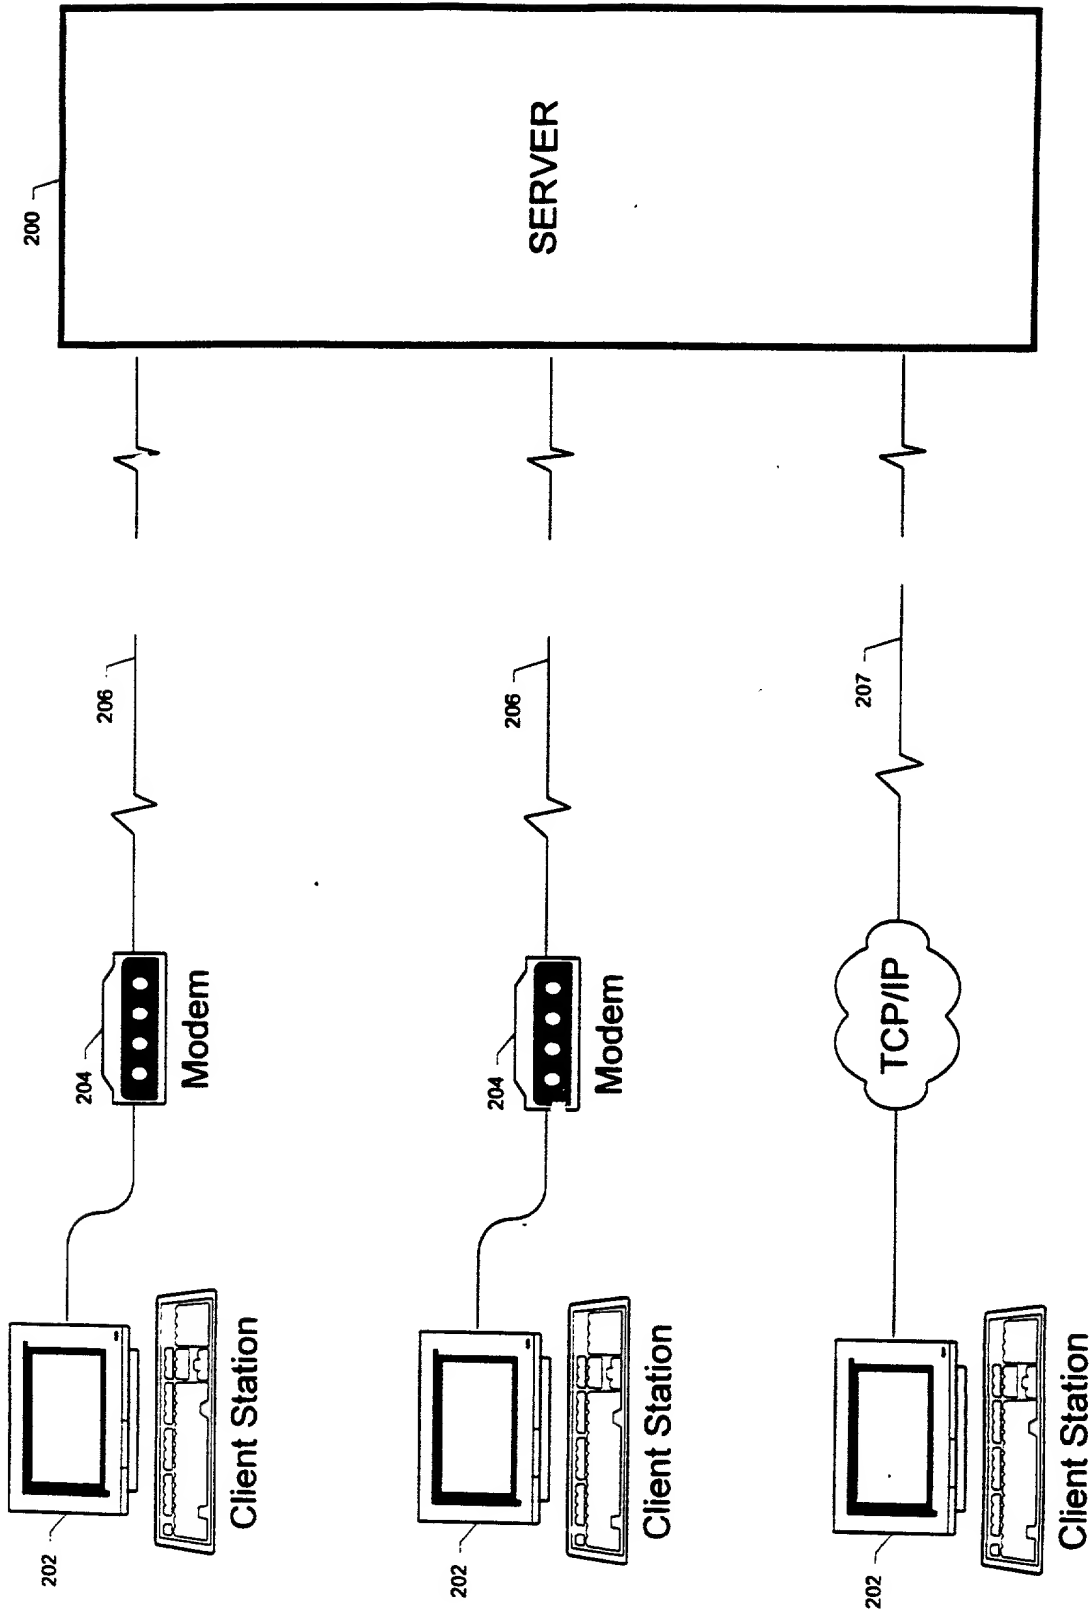


Fig. 2
(PRIOR ART)




Fig. 4

(PRIOR ART)





FIG. 5

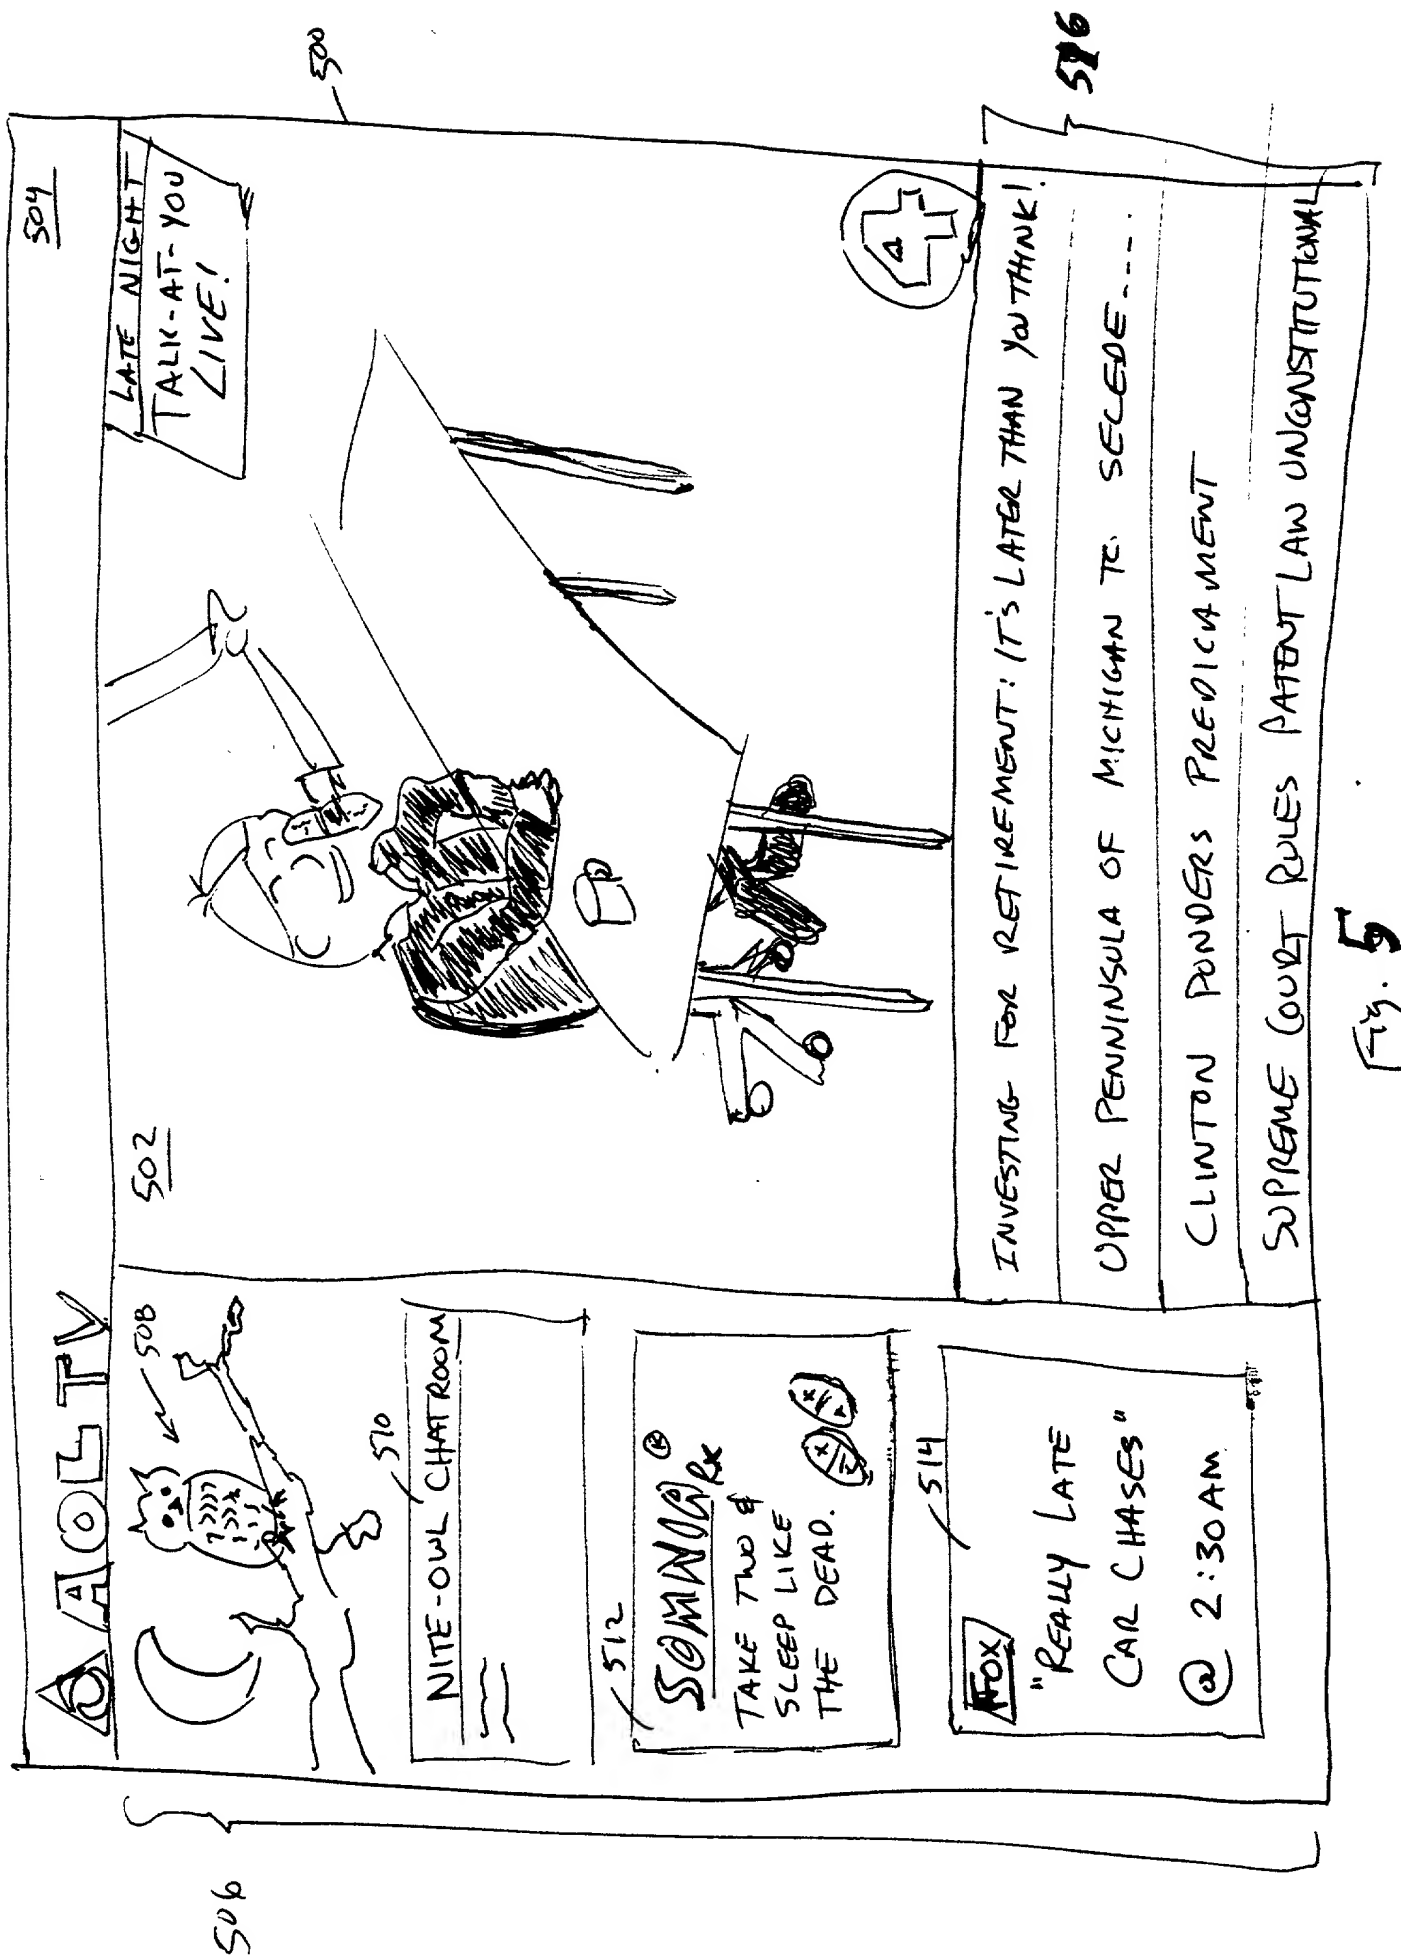

610 600

AOLTV

News
Morning News
Magazines
The Wire


612

Guide

608

abc daytime
GENERAL HOSPITAL
@ 11:00 AM

Vienna, Virginia

 **73°**
75°/58°

Wind: NE @ 10 mph
Humidity: 73%


ABC Video Source

602

Texas Governor Talks of White House-
Diane Sawyer interviews Texas governor
and GOP presidential hopeful
George W. Bush.

604

GOOD MORNING america



606

All Headlines
World/National
Business

Hillary Clinton edges closer to a
run for New York Senate seat.

Fig. 6A

66200 33333333

614



News
Nightly News
Magazines
The Wire

Guide




Sunday
@ 9pm

JOAN OF ARC

All Headlines
World/National
Business

Vienna, Virginia



73°
75°/58°

Wind: NE @ 10 mph
Humidity: 73%

CBS
Video
Source

On the eve of a youth violence summit,
Clinton vows not to let the entertainment
industries become scapegoats.

CBS Evening News • Dan Rather



Hillary Clinton edges closer to a
run for New York Senate seat.



Fig. 6B

616



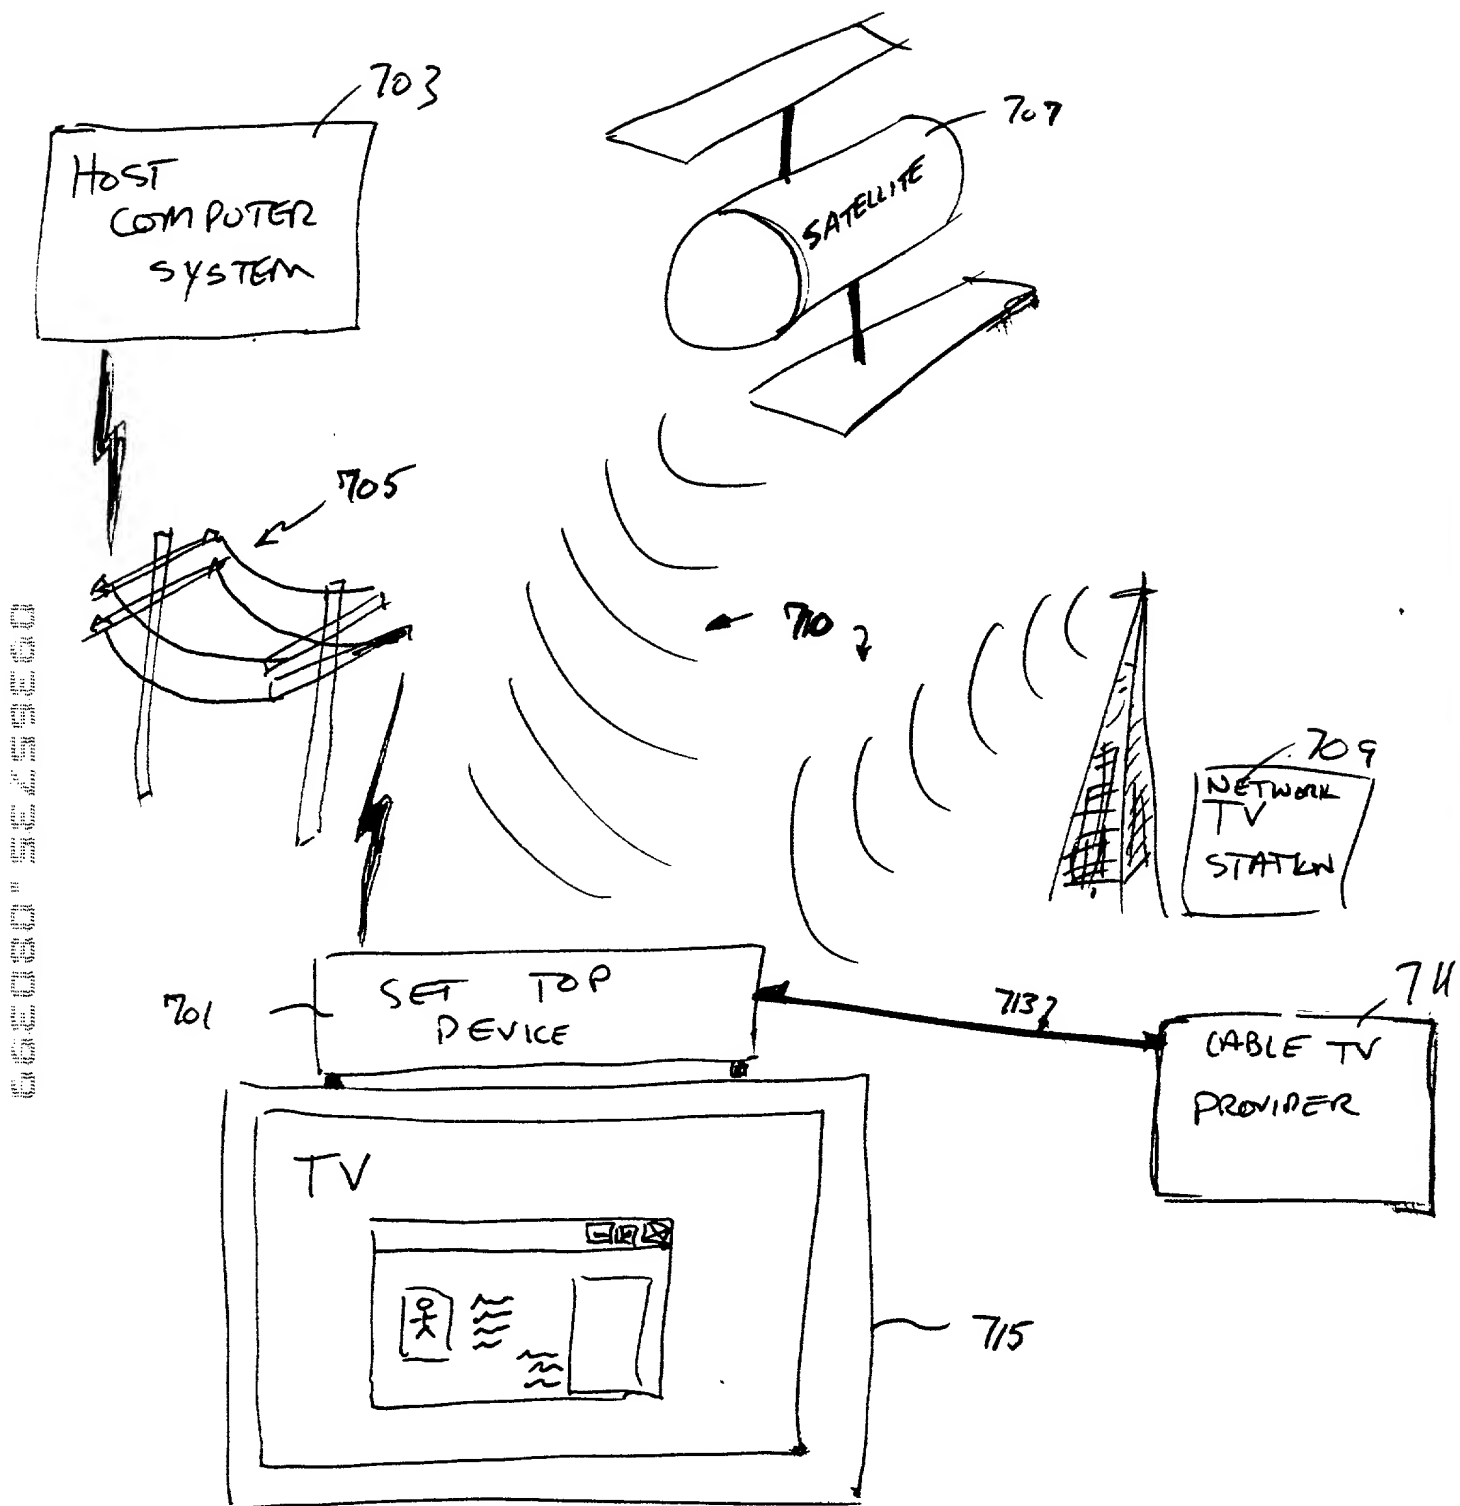


Fig. 7

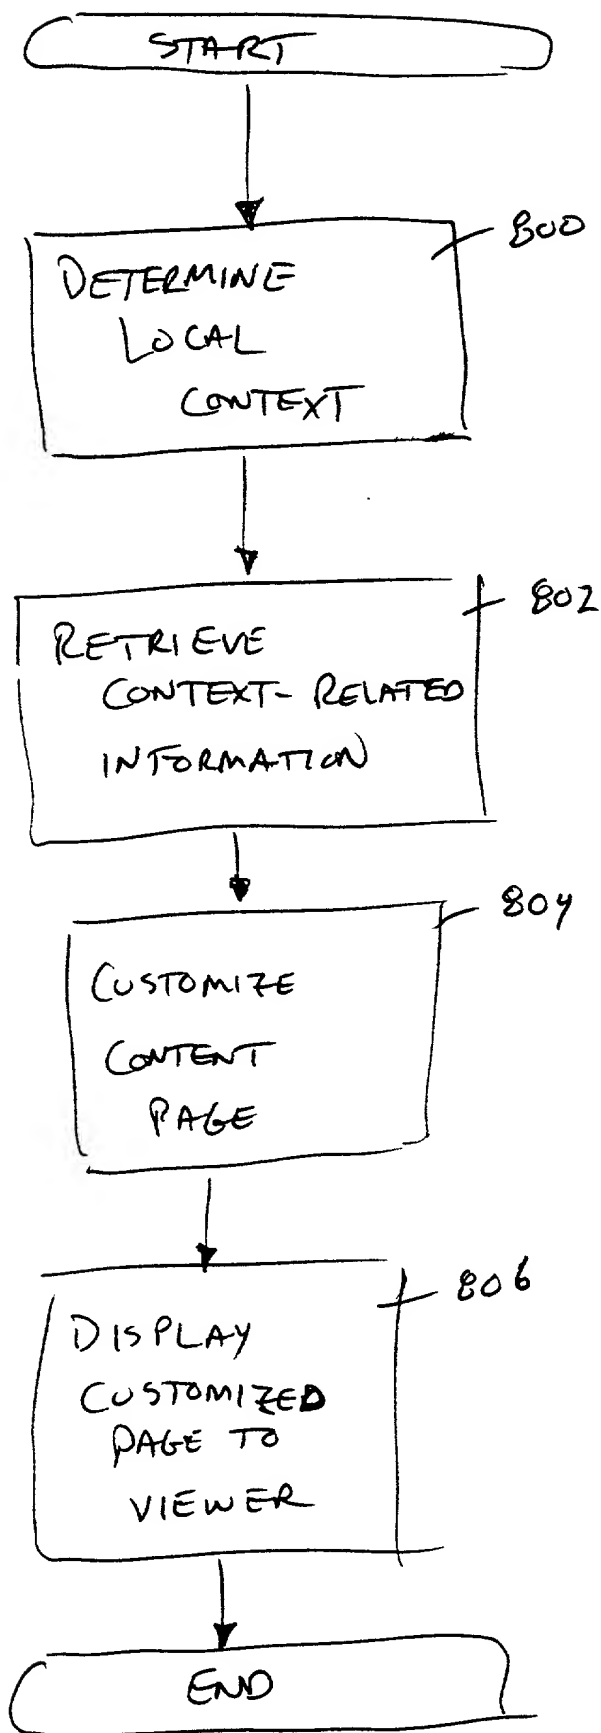


Fig. 8

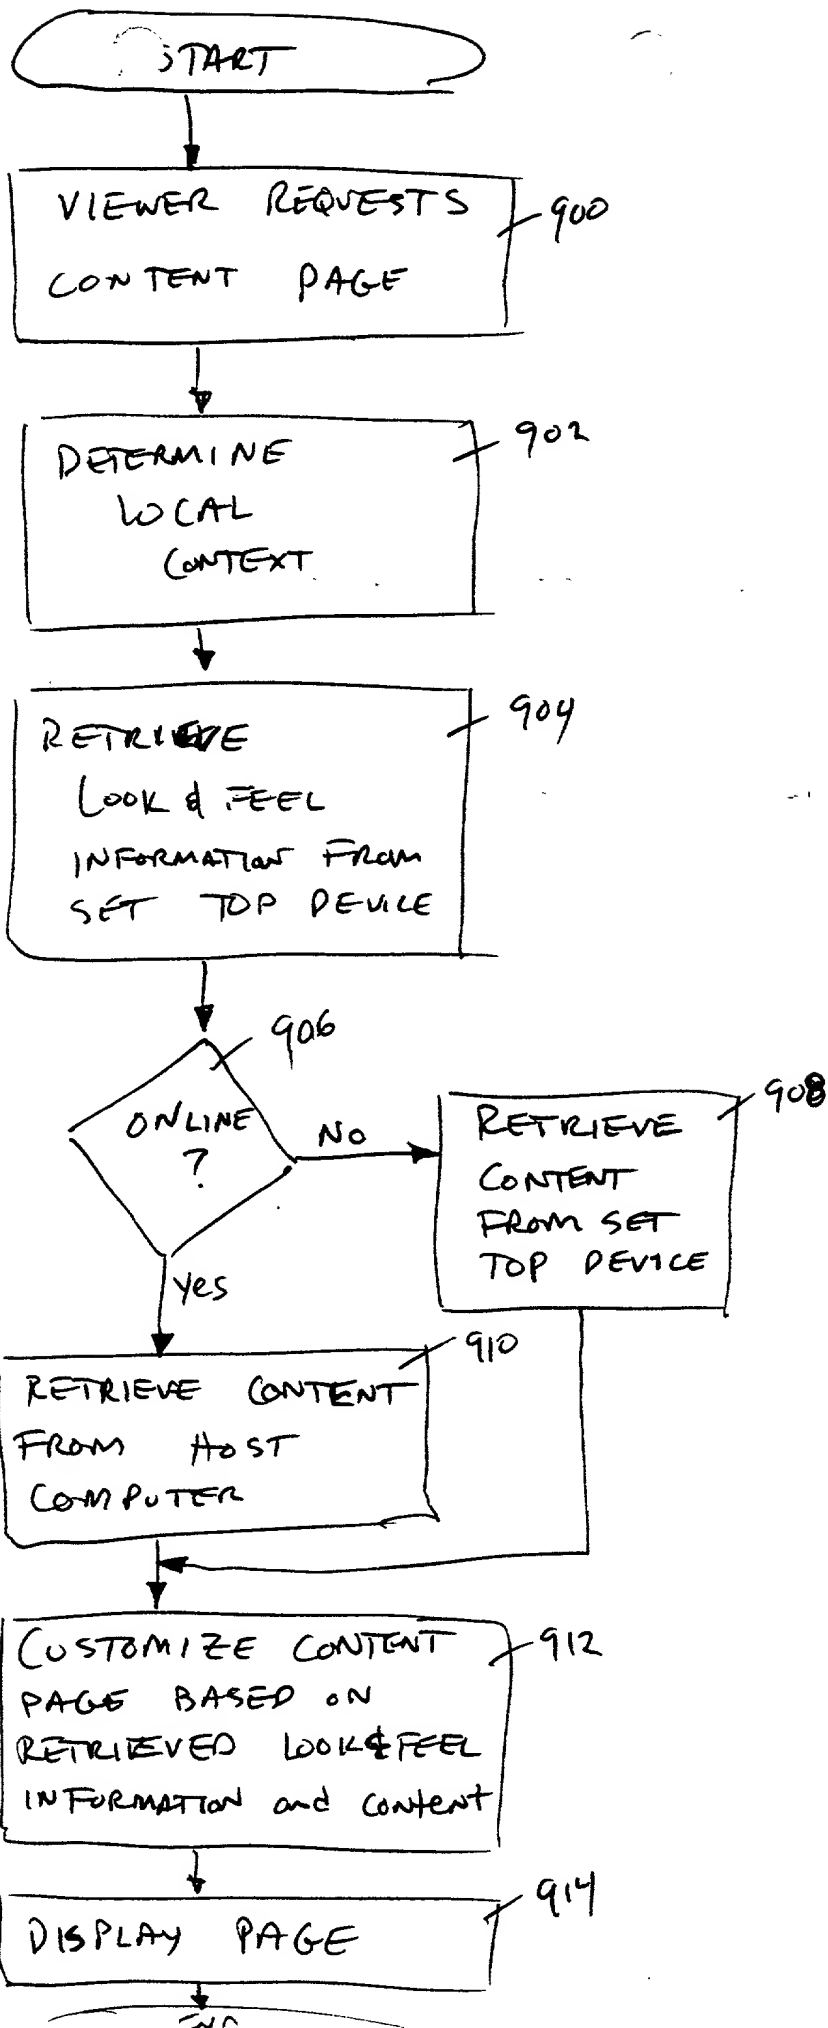


Fig. 9